

Minimix Foundationcrete Extra®



A ready-mixed concrete specially designed for foundations of two or more storeys, or where steel reinforcement is used.

Foundationcrete Extra when correctly specified and placed:

- **Will meet and exceed the relevant British and European Standards**
- **Is economical and easy to use**
- **Has high workability (on request) for ease of placement**
- **Can meet aggressive ground conditions on request**
- **Is ready to lay blocks and bricks upon within 24 hours**
- **Load bearing**
- **Is manufactured from responsibly sourced materials**
- **Is class 2 sulphate resistant.**

Applications

Strip foundation with reinforcement, such as house, domestic garage, conservatory, retaining walling, blinding and kerb backing.

Sectors

Light domestic and commercial.

Manufacturing standard

Meets NHBC and Local Authority requirements.

Batching in accordance with QSRMC accreditation.

Foundationcrete Extra conforms to the requirements of European Standard BS EN 206-1:2001 concrete – Part 1: Specification, performance, production and conformity and with the requirements of BS8500-1 and BS 8500-2 2006.

As with all Aggregate Industries' products, Foundationcrete Extra is manufactured under an independently monitored third party quality assurance scheme in accordance with ISO 9001, and with factory environmental compliance to ISO 14001.

Groundwork preparation

To ensure that your concrete doesn't dry out too quickly, we advise that the product is placed on a well compacted sub-base layer, which has in turn been covered with a layer of plastic sheeting. Remove top soil to the required level and your base needs to be 75mm larger than the finished slab.

Curing

Excessive moisture loss will attribute to unwanted dry shrinkage cracking - so Foundationcrete Extra must not be allowed to dry out too quickly. We highly recommended that you make provisions to cover your concrete with plastic sheeting once it has been laid. As a guide, curing should continue for seven days in the summer and ten days in winter. If required, we are able to offer a modified Foundationcrete Extra product which can reduce this time span.

We advise that you do not to place concrete during freezing conditions. If it is likely that overnight temperature may dip below 0°C, an air gap should be left between the layer of plastic sheeting and the top of the concrete surface.



Minimix Foundationconcrete Extra®

Sustainability and local sourcing

Responsible sourcing: Aggregate Industries is the first company in the world to achieve a BES 6001:2008 Responsible Sourcing Certificate from BRE Global. Products are assessed on:

- quality management
- environmental management
- health and safety management
- greenhouse gas emissions
- minimising raw material usage
- labour practice
- biodiversity
- community engagement.

Energy use: Aggregate Industries is at the forefront of sustainability and has committed to reduce carbon emissions by 20%, by 2016, based on a 2012 base line.

Manufacturing location: produced in the UK, with locally sourced materials under strict environmental and social legislation, for local supply.

Recyclable: 100% of the product can be recycled thus reducing the amount of material that is sent to landfill.

Policies

Aggregate Industries' policies on the environment and community, health and safety and sustainable solutions for different product applications can be viewed on our website www.aggregate.com

COSHH data

Please be aware that concrete is both abrasive and alkaline, so protective clothing, gloves, wellingtons, overalls and safety glasses etc. should always be worn. Cement can burn your skin.

Full COSHH data on Minimix products is available on request. Please call the technical helpline on 01283 712677.

Technical support


Detailed guidance and assistance with the preparation of specifications and use of Minimix products is available through the sales offices. A free technical service is also available.

Call our Minimix technical services at the nearest sales location to your contract.


Minimix truck dimensions

	4m ³	3.5m ³
Overall width - excluding mirrors	2491	2491
Overall width - including mirrors	2923	2923
Overall length	7168	7168
1st chute pivot to end of 2nd chute	1906	1906
1st chute pivot to end of 3rd chute	2669	2669

4m Minimix truck

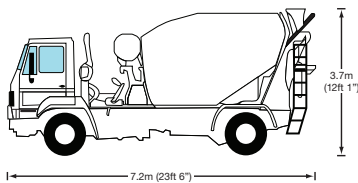

3.5m Minimix truck

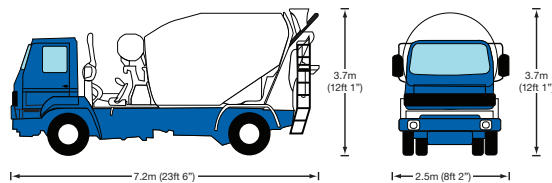

Minimix (Scotland)
Northern Area: 0845 070 0406
Central Belt: 0845 075 7777

www.aggregate.com

Minimix
Devon, Dorset and Somerset: 0844 557 8360
Cornwall: 01208 74323
West of Pennines: 08450 70 60 90
East of Pennines: 08454 56 33 74
South East: 0845 6013001
Midlands: 0845 601 3231



Foundationconcrete Extra® is a registered trademark.

The information contained within this publication was accurate at time of production. However, Aggregate Industries reserves the right to introduce modifications or changes to detail at any time without notice. No charge is levied for this publication or advice therein, and accordingly the company, its employees and authorised agents can accept no liability whatsoever, either indirectly or directly arising from the use of its products in connection with any information or advice contained in this guide.