

# SUPER WHITE CEMENT



Lafarge Super White Cement is a quality-assured BS EN 197-1 CEM I cement and carries the CE mark.

## GENERAL INFORMATION

Lafarge Super White is a high early strength 52,5R cement in a bright white colour designed for an attractive finish.

## FEATURES


- Bright white colour provides attractive, light coloured natural looking concrete
- Can be used for traditional nominal mixes for all general application
- Does not contain any pigments
- Compatible with all standard admixtures
- Used in exactly the same way as grey Portland cement and can be used with coloured pigments as required

## APPLICATIONS


Ideal for applications that require an aesthetic finish, including:

- Cast stone
- Architectural precast concrete
- Paving slabs
- Street furniture
- Terrazzo flooring

IDEAL FOR:




CONCRETING




BRICKLAYING

---




ARCHITECTURAL WORKS / VISUAL CONCRETE



RENDERING

HIGHER STRENGTH



## AVAILABILITY

Available in 25kg paper bags.


## STORAGE

This product must be stored in unopened bags clear of the ground. This product naturally contains less than 2ppm Cr VI+ and therefore there is no maximum shelf life for safety purposes.

## MIXING GUIDANCE (BY VOLUME)

### MORTAR MIXES

General mix

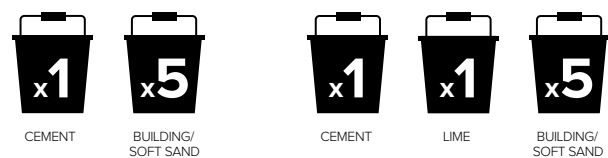

### CONCRETE MIXES

General mix



## CONDITIONS OF USE

- Super White cement may be used in the range of traditional nominal mixes as for traditional Portland cement.
- To achieve optimum performance, it is essential that Lafarge Super White cement is correctly specified and used.
- As with other cements in building work, there is no substitute for good site practice. It is essential to use the correct materials, proportion and mix the materials properly, add the correct amount of water, compact, cure and protect as appropriate.
- Normal hot and cold weather practice should also be followed.
- The final strength and finish of this product will depend on the user having the necessary skills and knowledge of the product and its application.
- Lafarge cannot be held responsible where workmanship has not been carried out in accordance with good practice.
- Manual handling should comply with The Manual Handling Operations Regulations 1992.
- Super White cement is manufactured from natural products, therefore slight shade variations may occur.

## TECHNICAL SUPPORT

Should you require information for this or any other product within the Lafarge range, please contact our Customer Support team on 01285 646900 or visit our website at: [www.lafargecement.co.uk](http://www.lafargecement.co.uk)

## HEALTH AND SAFETY

Contact between cement powder and body fluids (e.g. eye fluids) may cause irritation, dermatitis or burns. Cement is classified as an irritant under the Chemicals (Hazard information and Packaging) Regulations. Please refer to the product safety data sheet for full information.

